BRUHAT BANGALORE MAHANAGARA PALIKE

YELAHANKA ZONE

Name of the work: **Estimate for Construction of RCC drain at Doddachikkanna layout in ward no 03, Attur**

							Estimate Cost:		1000000.00
Sl No	Description	Unit	No.	L	B	D	Qty	Rate	Amount
1	KSRRB 300-1. Earthwork excavation by manual means in ordinary soil involving an average horizontal throw upto 2 meters and an average lift upto 0.5 m, excavated surface leveled and sides neatly dressed, the disposed earth to be leveled neatly after breaking of clods complete as per specifications. MORTH / Chapter 3 **Page No. 143 / Item No. 19.1, PWD SR 2018-19**	Cum							
	Doddachikkanna layout		1	123.00	1.00	0.95	116.85		
	Basic Rate	130.00					116.85	250.24	29241.00
	Add loading and unloading Charges **It No 17.1 KSRRB M 100-1**	68.00							
	Average weight of earth 1.28 tonne / kg for 11.90 Km = 1.28 T X 11.90Km X 2.5 Tonne / km = 38.08	38.08							
		236.08							
	Area Weightage @ 6%	14.16							
	Total	**250.24**							
2	KSRB 4-1.3 : Providing and laying in position **plain cement concrete of mix 1:4:8** with OPC cement @ 180kgs, with 40mm and down size graded granite metal coarse aggregates @0.85cum and fine aggregates @ 0.57cum machine mixed, machine mixed, concrete laid in layers not exceeding 15 cms. thick, well compacted, **in foundation**, including cost of all materials, labour, HOM of machinery, curing complete as per specifications. Specification No. KBS 4.1, 4.2. **Page No.13, Item No. 4.3 of PWD SR 2018-19**	Cum							
	Bottom Concrete								
	Doddachikkanna layout		1	123.00	1.00	0.15	18.45		
	Basic Rate	5102.00					**18.45**	5408.12	99780.00
	Area Weightage @ 6%	306.12							
	Total	**5408.12**							
3	Providing and laying **cement concrete** using 20 mm and down size granite coarse aggregates and fine aggregates of ready mixed concrete **(RMC) M 20** for R.C.C works laid in 15 cms thick layers and well compacted vibrating, curing, **for raft foundation column footing , main and secondary beams** with all lead and lifts etc., complete (exclusive of cost of steel and fabrication charges.) **Page No. 18, Item No. 4.48, PWD SR 2018-19**	Cum							
	Bottom Concrete								
	Doddachikkanna layout		1	123.00	0.90	0.15	16.61		
	Side Wall								
	Doddachikkanna layout		2	123.00	0.15	0.60	22.14		

Sl. No.	Description	Unit	No.	L	B	D	Qty	Rate	Amount
	Basic Rate	5444.00					**38.75**	5770.64	**223583.00**
	Area Weightage @ 6%	326.64							
	Total	**5770.64**							
4	KSRB 4.9.2 : Providing **T.M.T steel reinforcement for R.C.C work** including straightening, cutting, bending, hooking, placing in position, lapping and / or welding wherever required, tying with binding wire and anchoring to the adjoining members wherever necessary complete as per design (laps, hooks and wastage shall not be measured and paid) cost of materials, labour, HOM of machinery complete as per specifications. Specification No. KBS 4.6.3 - **TMT bars Fe 500 Page No. 18 / Item No. 4.46.2, PWD SR 2018-19**	Tonne							
	For RCC Drain @ 60 Kg / Cum		0.06	38.75			2.32	75223.96	**174873.00**
	Basic Rate	70966.00							
	Area Weightage @ 6%	4257.96							
	Total	**75223.96**							
5	KSRB 4-6.4 : Providing and removing **centering, shuttering, strutting, propping** etc., and removal of form work for **vertical surface such as walls at any thickness**, including attached pilasters, buttresses, plinth cills and string courses cost of all materials, labour complete as per specifications. Specification No. KBS 4.6.2 **Page No. 16 / Item No. 4.31 PWD SR 2018-19**	Sqm							
	Side Wall								
	Doddachikkanna layout		4	123.00		0.60	295.20		
	Basic Rate	358.00					**295.20**	379.48	**112022.00**
	Area Weightage @ 6%	21.48							
	Total	**379.48**							
6	KSRB 4-1.6 : Providing and laying in position **plain cement concrete of mix 1:2:4** with cement @ 240kgs, with 20mm and down size graded granite metal coarse aggregates @ 0.69 cum and fine aggregtes @ 0.459cum, machine mixed, concrete laid in layers not exceeding 15 cms. thick, well compacted, **in foundation, plinth and cills**, ncluding cost of all materials, labour, HOM of machinery, curing complete as per specifications. Specification No. KBS 4.1, 4.2. **Page No.13, Item No. 4.6 PWD SR 2018-19**	Cum							
	Covering Slab Ramp								
			1	123.00	0.30	0.10	3.69		
	Basic Rate	5422.00					**3.69**	5747.32	**21208.00**
	Area Weightage @ 6%	325.32							
	Total	**5747.32**							

Sl. No	Description	Unit	No.	L	B	D	Qty	Rate	Amount
7	Providing **precast slab of 100mm thick** including cost of all materials, labour, curing, transportation, loading unloading, etc., complete as per the direction of engineer in charge - Data rate	Sqm							
			1	123.00	0.90	0.6	66.42		
	missing slabs		60	0.90	0.60		32.40		
							98.82	2337.00	230942.00
	Sub Total								891649.00
	GST 12%								106997.88
	Miscellaneous and other Charges	L/S							1353.12
								Total	1000000.00

(Rupees ten lakhs only)

CERTIFICATE:

1 The work spot has been inspected and the work is found necessary.
2 This estimate is prepared as per PWD SR of 2018-19.
3 This work included under 2018-19 POW Grants.
4 The provisions were made in this estimate are necessary and adequate.
5 This works come under B.B.M.P. limits.

Assistant Engineer
Ward No. 03

Assistant Executive Engineer
Bruhat Bangalore Mahanagara Palike
Yelahanka Satellite Town Sub Division

Executive Engineer
Bruhat Bangalore Mahanagara Palike
Yelahanka Division

Administrative Sanction for Rs. 10.00 Lakhs
Ten Lakhs only
is accorded under head P.1771 - 2018-19
Registered as CE No. ..... Subject to conditions contained in enclosed memo No. EE/AA/153/18-19 Dt. 25.2.19

Executive Engineer

TECHNICALLY SANCTIONED FOR Rs. 10.00 Lakhs
Rupees Ten Lakhs only
Under P.1771 - 2018-19
Registered as CE ( ) No. 9 9
Subject to conditions contained in enclosed memo EE ( ) No. ...../9/
Dt. ..... Estimate A/ Sanctioned
EE/TS/177/18-19 No. .....
Dated 25.2.19 Rs. 10.00 Lakhs

Executive Engineer

NAME OF WORK: CONSTRUCTION OF RCC DRAIN AT DODDACHIKKANNA LAYOUT IN WARD NO: 03 ATTUR.

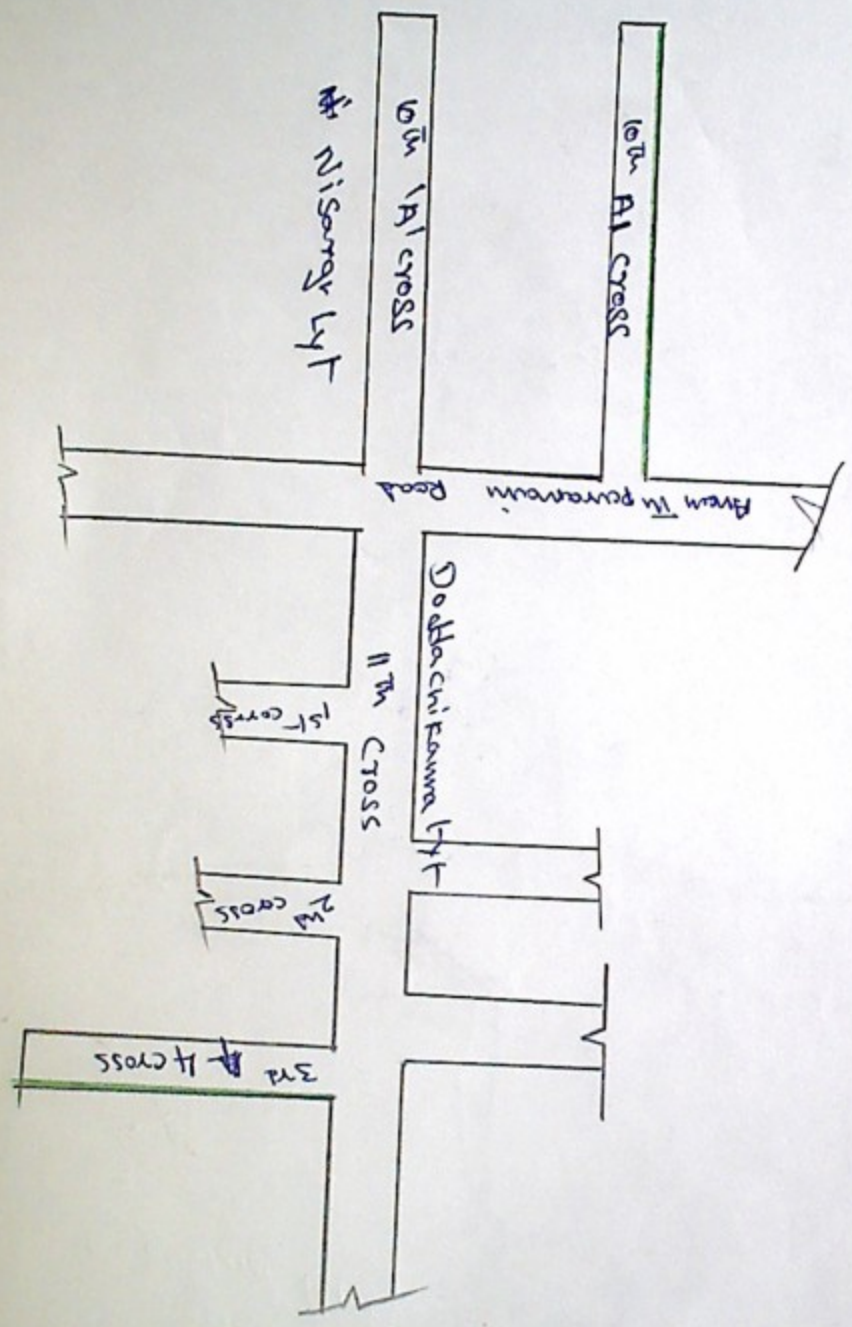

AE

— RCC Drin with Slabs.

ಸಹಾಯಕ ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ಯಲಹಂಕ ಉಪನಗರ ಉಪವಿಭಾಗ,
ಬಿ.ಬಿ.ಎಂ.ಪಿ. ಬೆಂಗಳೂರು-560064